




Anti Vandal Switch Ø 22mm


Order Code

Series	Actuator Options	Terminal Options	Function Options	Material Options	Illumination Style Options	Led- Color Options	Illumination Voltage Options	Graphic Options
L22T	<input type="checkbox"/> F-Flat <input type="checkbox"/> H-Raised	<input type="checkbox"/> NONE-Solder lug (2.8X0.5)	<input type="checkbox"/> M-Momentary 1-1NO1NC 2-2NO2NC Z-Latching 1-1NO1NC 2-2NO2NC	<input type="checkbox"/> S-Stainless steel <input type="checkbox"/> A-Anodized aluminum	<input type="checkbox"/> NONE-Non-illuminated. <input type="checkbox"/> D-Dot <input type="checkbox"/> R-Ring <input checked="" type="checkbox"/> PS-Power backlit symbol  <input type="checkbox"/> PY-Ring illum.& Power backlit symbol 	<input type="checkbox"/> NONE-Non-illuminated. <input type="checkbox"/> W-White <input type="checkbox"/> Y-Yellow <input type="checkbox"/> B-Blue <input type="checkbox"/> G-Green <input type="checkbox"/> R-Red <input type="checkbox"/> 3A-Red/ Green/ Blue	<input type="checkbox"/> NONE-Base voltage* 3.3V 6V 12V 24V 36V 110V 220V	<input type="checkbox"/> NONE-Non-marking LE-Laser etched

Notes:



* Base voltage on LEDs:
1.8V @20mA for red and yellow LED colors
2.8V @20mA for blue, green and white LED colors

Description

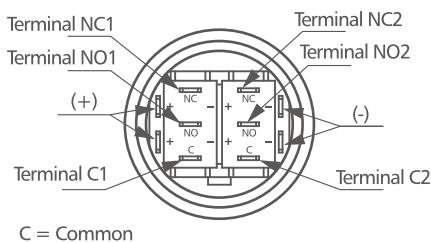

C = Common
NO = Normally open
NC = Normally closed



Terminals (-) and (+) used with illum. option only

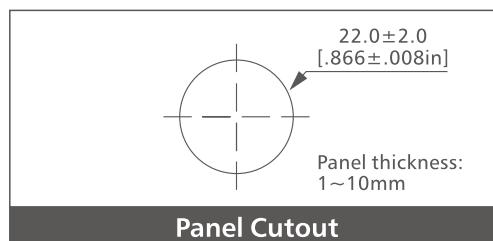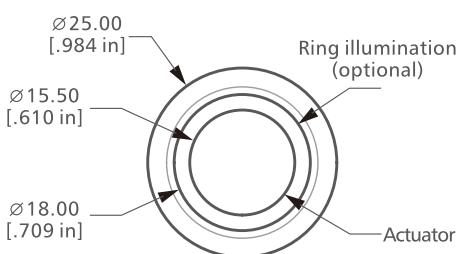

Technical Data



Type	L22T-F / L22T-H
Illuminated type	Non-illuminated / Ring illuminated / Dot illuminated
Terminal	Solder lug (2.8X0.5)
Max. switch rating	Ith: 3A Ui: 250VAC
Contact resistance	≤50mΩ
Insulation resistance	≥1000mΩ
Dielectric strength	2000VAC
Operation temp.	-20°C ~ +55°C
Mechanical life	2,000,000 cycles
Electrical life	100,000 cycles
Contact material	Silver alloy
Torque	5~14Nm
Operation pressure	Approx. 3~5N
Protection	IP65/ IK09
Material	
Button	Stainless steel / Anodized aluminum
Body	Stainless steel / Anodized aluminum
Base	PBT
Color	LED 3.3V / 6V / 12V / 24V / 36V / 110V / 220V  Approx. 40,000 hours

Actuator Options



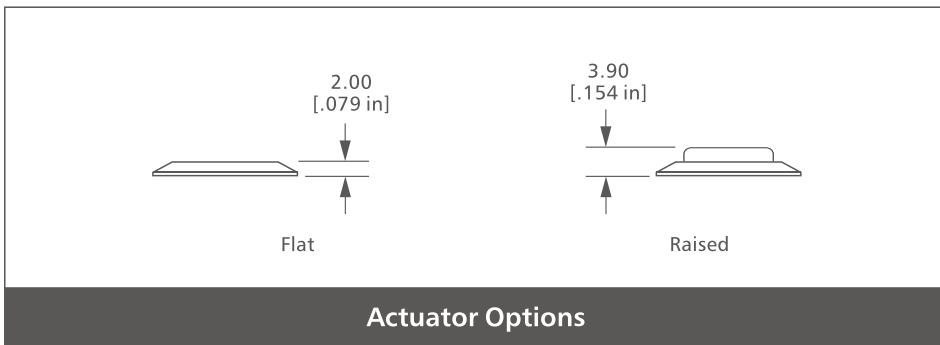


DPDT
2NO2NC ON (OFF) / OFF (ON)
Contact configuration
_____ illuminated

Illum. Options

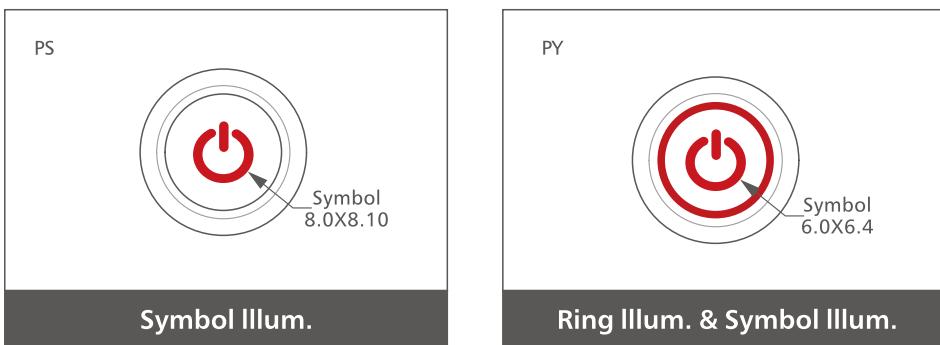

SPST
1NO1NC ON (OFF) / OFF (ON)
Contact configuration
illuminated

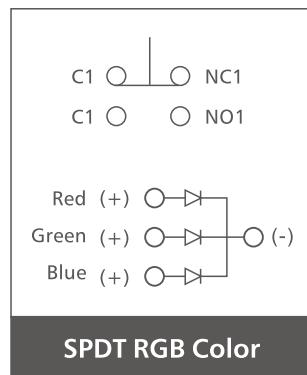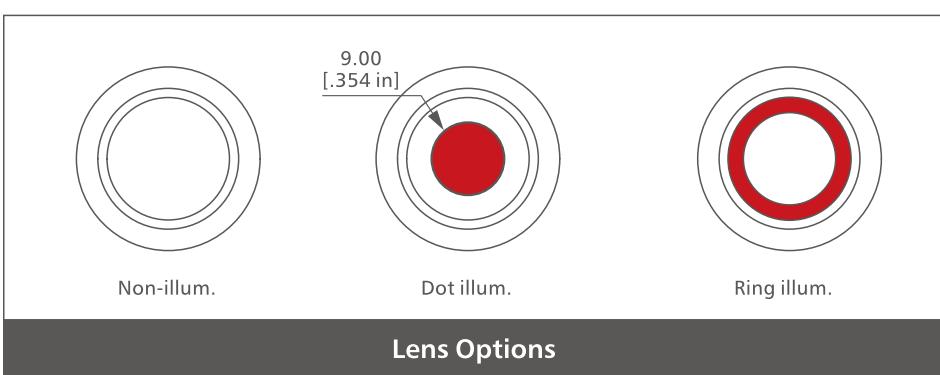

SPST
1NO1NC ON (OFF) / OFF (ON)
Contact configuration
illuminated

Functions

Dimensions

