



Distinctive Features

Bushing diameter:
16 (.630), 19 (.748), 22 (.866) or 30 mm (1.181)
Sealed to IP68 and IP69K (switches mounted on panel)
Easy to clean metal surface
Very long life expectancy
Illumination or Non-illumination



Environmental Specifications

- Sealing: IP68 per IEC 60529, IP69K per DIN 40050-9 (switches mounted on panel)
- Vibration resistance : 10-500 Hz / 10 g per IEC 60068-2-6
- Operating temperature : -40°C to +75°C (-40°F to +167°F)
- EMC compatibility according to EN 61058-1 for the whole range
- EMC compatibility according to EN 61000-4 & EN61000-6-2 for 1A



Materials

- Case: aluminum, anodized or stainless steel 316L
- Multi-wire leads section 0.22mm² length 300mm, twisted by pair
- Case, length 300mm, section depending on switch model
- PC terminals : bronze, tin plated

Note : to maintain the ESD performance, always add a ground washer when the panel is made of non-conductive material (PVC, polycarbonate).



Electrical Specifications

- Max. current / voltage rating with resistive load:
-Function NO : standard 200 mA 24 VAC / DC, 1 A 24 VAC / DC or request
-Function NC : standard max. 600 mA 24 VAC / DC
- Switch resistance ON : 10Ω max.
- Switch resistance OFF : 5MΩ max.
- Life expectancy : 50 million cycles
- LED consumption: illuminated dot 10mA - illuminated ring 20mA



Color



Blue



Green



Yellow



White




Red




Sealing

SEALING IP68



Continuous immersion in water
IP68 test conditions
Continuous immersion in water
(1.5m, 24 hours)

SEALING IP69K



High pressure, high temperature wash
down IP69K test conditions

- Pressure : 80-120 bars
- Distance : 15cm
- Temperature : 80°C ± 5°C (176°F ± 41°F)
- Flow : 14-16 l/mn
- Duration : 30 seconds per position



General Specifications

- Operating force: 2 to 6 N
- Torque : 2.5 Nm min. -3 Nm max.

Specifications



Electrical Functions

FINGER PRESSURE applied to switch

1 = pressure



0 = no pressure

OUTPUT

Momentary NO (pulse)
No external power supply
required

Momentary NC (pulse)
No external power supply
required

Latching (ON - OFF)
Requires external power supply

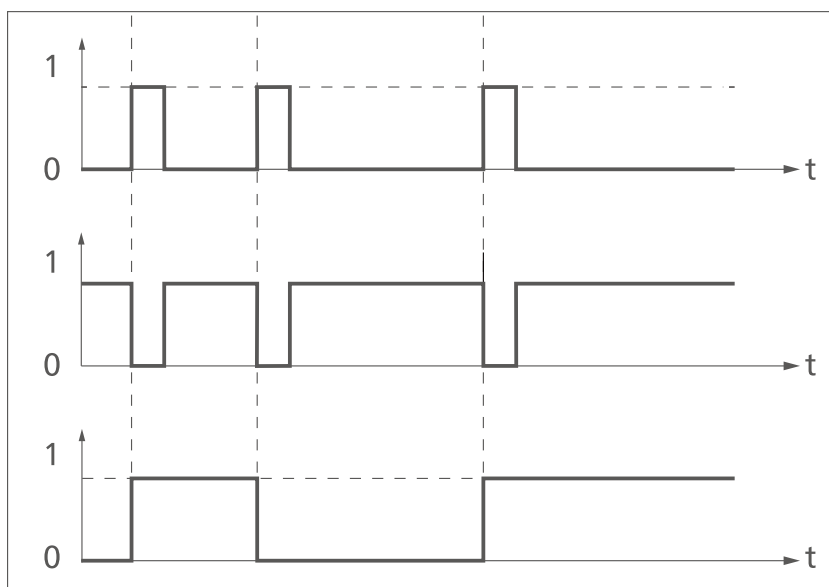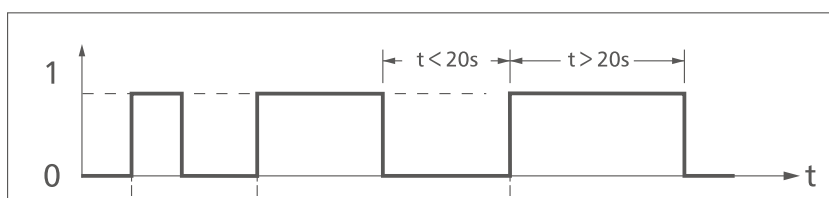

1 = closed output 0 = open output




Wiring Diagrams

Function	Non-illuminated	1 LED*	2 LEDs	3 LEDs
Momentary NO				
Momentary NC				
Momentary NO Prolongated Pulse				
Latching (ON - OFF)				BR brown +V BK black GND BL blue output

Legend: B = black, A = same colour as LED

*LED colour is indicated by the bottom of the product.

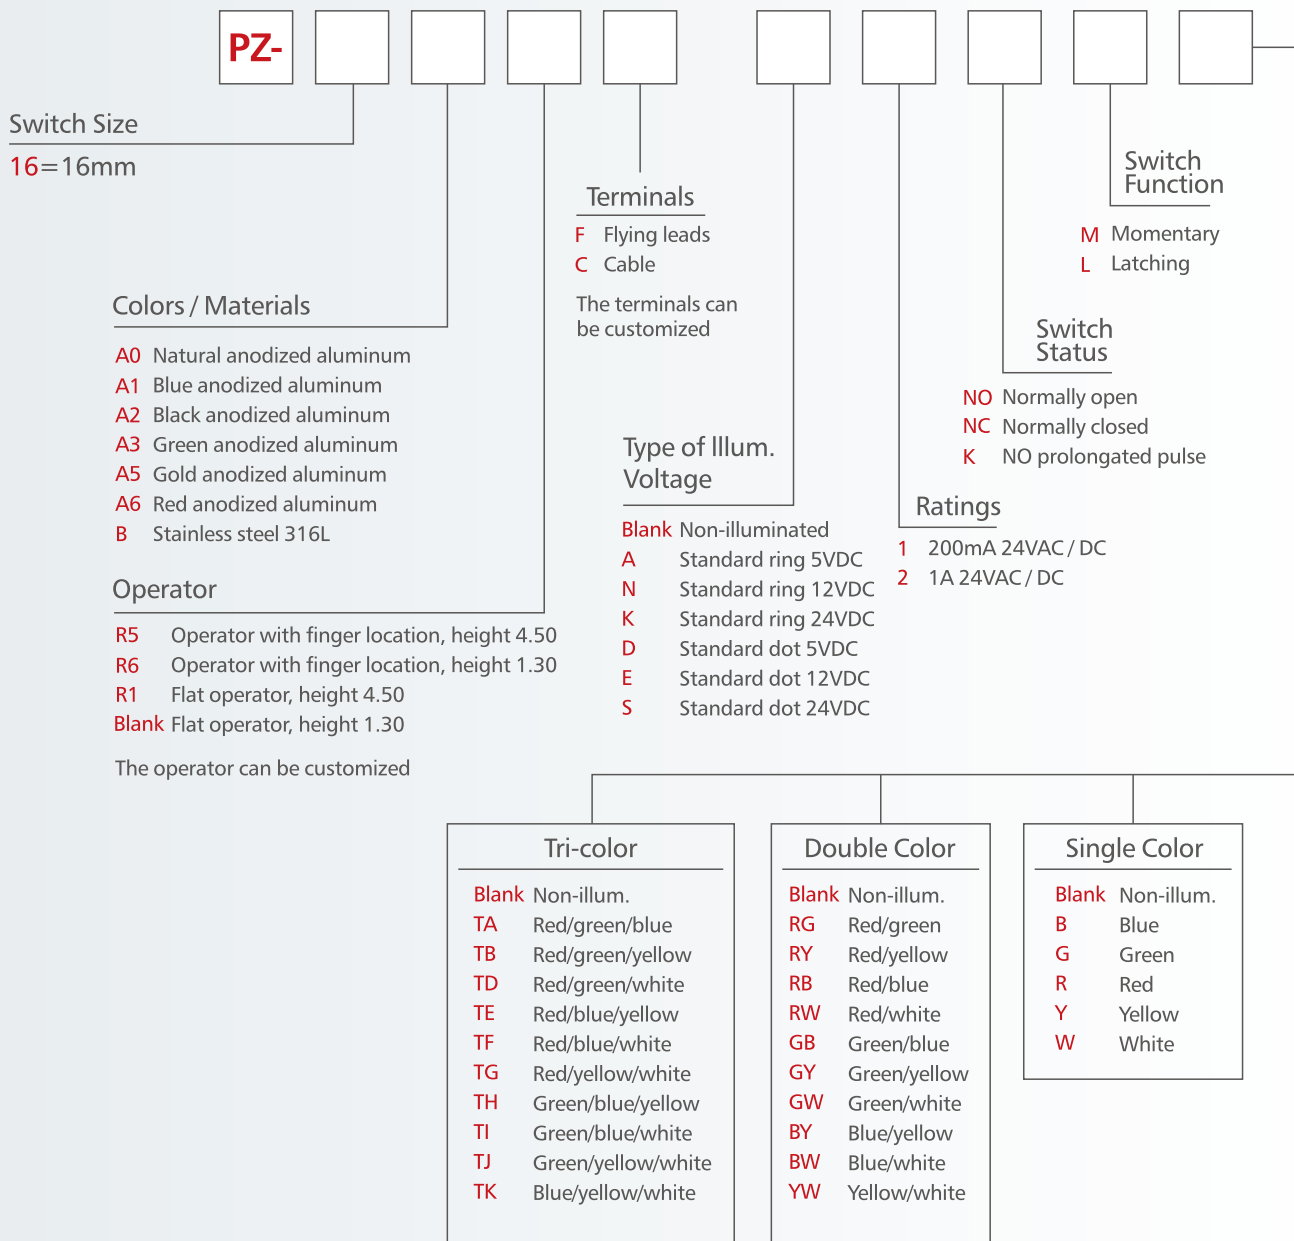

NOTICE : please note that not all combinations of above numbers are available.
Refer to the following pages for further information.




Mounting accessories standard hardware supplied :1 hex nut and 1 O-ring



Packing unit: 20 pieces

For options not listed above, please contact LANGIR.

The appearance of the products listed on this file, color, parameters are for reference only, issued a kind of LANGIR Company shall prevail.
LANGIR Company reserves the right to modify or cancel the relevant parameters of this file does not advance notice.
If in doubt, please contact customer service hotline.



Shown with flying lead terminals.


Non-illuminated



PZ16A6R1F1NOM

Flat

Finger location

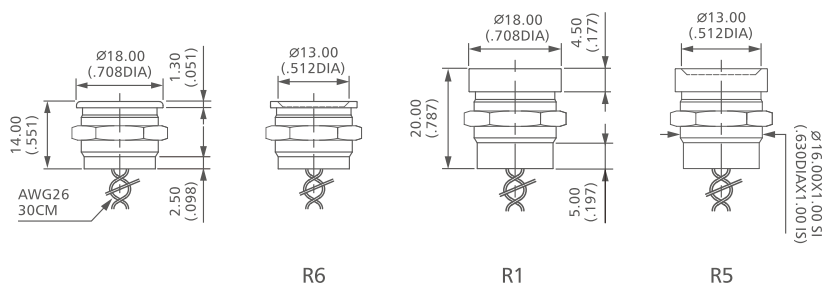


Dot illuminated



PZ16BF51NOMG

Flat

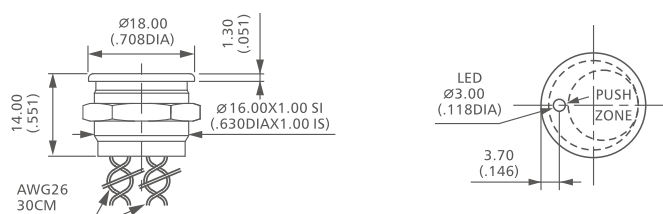

Ring illuminated



PZ16BR1FN1NOMR

Flat operator, height 4,50 (.177)

