




Anti Vandal Switch Ø 12mm

Order Code

Series	Actuator Options	Terminal Options	Function Options	Material Options	Actuator Color Options
☐ ☐	☐	☐	☐	☐	☐
V12	B-Round	P-Solder lug (2.0X0.5) NONE-Screw	NONE-Momentary 1NO	S-Stainless steel N-Nickel plated brass A-Zin-Al alloy black color	W-White Y-Yellow B-Blue G-Green R-Red BK-Black

Description



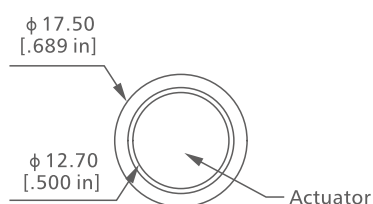


Panel thickness: 1~4.0mm

Technical Data

Type	V12-B-S	V12-B-N	V12-B-A
Illuminated options	Non-illuminated		
Front shape	Round		
Terminal	Screw / Solder lug (2.0X0.5)		
Max. switch rating	2A 48VDC		
Contact resistance	≤ 50m Ω		
Insulation resistance	≥ 1000m Ω		
Dielectric strength	2000VAC		
Operation temp.	-20°C ~ +55°C		
Mechanical life	1,000,000 Cycles		
Electrical life	200,000 Cycles		
Contact material	Silver alloy		
Torque	5~14Nm		
Operation pressure	Approx. 5N		
Protection	IP65 / IK08		
Material			
Actuator	Stainless steel / Brass / PBT		
Body	Stainless steel	Nickel plated brass	Zin-al alloy
Base	PBT		
Color	R/G/Y/O/B/W/BK		

Solder Terminal

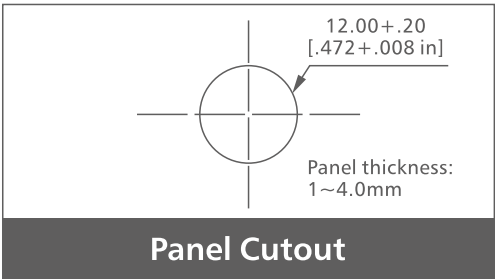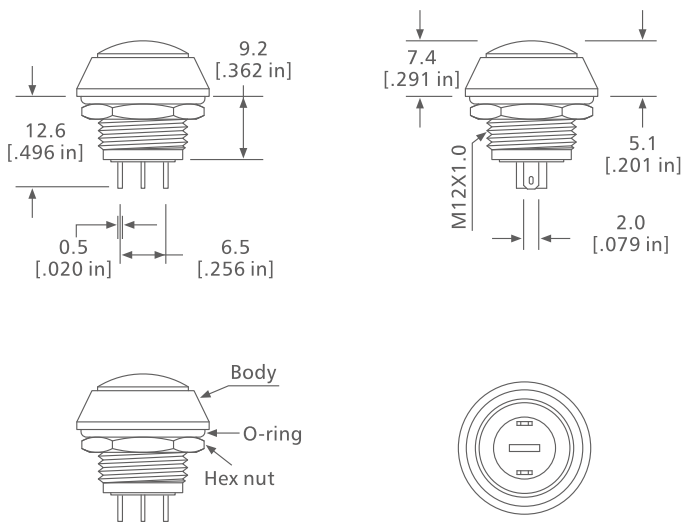

Screw Terminal

