



Ultra Short Anti Vandal Switch Ø 19mm / Ø 22mm / Ø 25mm

Specifications

Electrical rating: 2A, 36VDC
Mechanical life: 1000,000 Cycles
Electrical life: 50,000 Cycles
Contact resistance: 50mΩ Max
Insulation resistance: 1000mΩ Min
Dielectric strength: 2.000VAC
Operating / Storage Temperature: -25°C to 55°C
Travel: 0.5mm
Moisture protection: IP67
Actuation force: ≤3N
Panel thickness: 1-3mm
Mounting nut torque: 5-14Nm

Features & Benefits

- 19, 22 or 25mm diameter panel cutout
- Variety of LED option
- Multiple function options
- Ring illumination available
- IP67 / IP68 rated

Order Code


Series	Actuator Options	Terminal Options	Function Options	Material Options	Illumination Style Options	LED-Color Options	Illumination Voltage Options	Graphic Options
☐ L12U L16U L19U L22U L25U	☐ F- Flat	☐ NONE-Solder lug(2.0x0.5)	☐ M-Momentary 1-1 NO	☐ S-Stainless steel A-Anodized aluminum	☐ NONE-Non-illum. R-Ring	☐ NONE-Non-illum. W- White R- Red G-Green B-Blue Y-Yellow	☐ NONE-Non-illum. 1-Base voltage** 3.3V 6V 12V 24V	☐ NONE-Non-illum. LE-Laser etched

Notes:

*Base voltage on LEDs:
 1.8V @ 20mA for red, yellow LED colors 2.8V @ 20mA for blue, green and white LED colors

Dimensions

Ultra Short Anti Vandal Switch Ø12mm

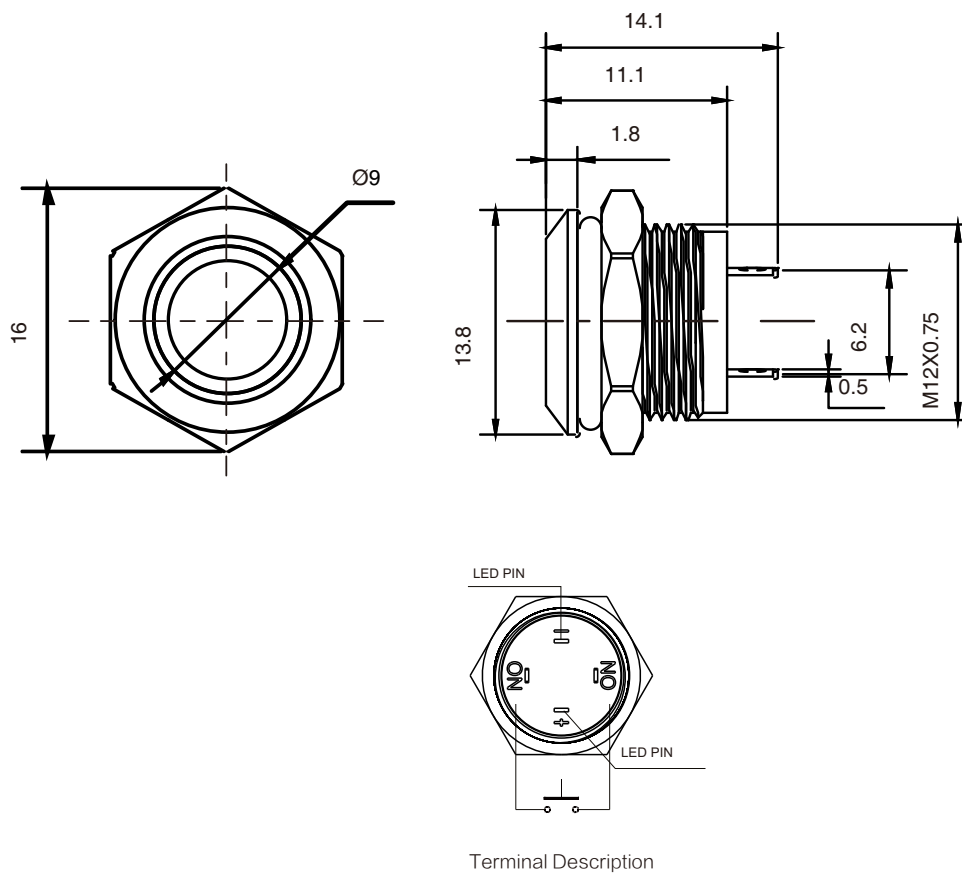

Dimensions

Ultra Short Anti Vandal Switch Ø16mm

