



Indicator Buzzer



Anti Vandal Pilot Lamp

Specifications

Contact arrangement: Indicator
Operating / Storage Temperature: -20°C to 55°C
Lamp life: 40,000 hours nominal
Ingress protection: IP67
Panel thickness: 1-6mm or 1-10mm, (depending on mounting diameter)
Mounting nut torque: 5-14Nm

Features & Benefits

- Pilot indicator light
- Multiple panel cutout sizes: 6mm to 19mm dia.
- Multiple illumination voltage options
- Multiple LED color options
- IP67 rated

Order Code


Series	Indicator Diameter	Terminal Options	Lens	Illumination Style Options	Material Options	Led-Color Options	Illumination Voltage Options
PI	06- 6mm Dia. 08- 8mm Dia. 10- 10mm Dia. 12- 12mm Dia. 14- 14mm Dia. 16- 16mm Dia. 19- 19mm Dia.	NONE Solder lug(2.8x0.5) K-Wire-leads 150mm long or request	F- Flat C- Chamfer	D- Dot illum. R- Ring illum.**	S-Stainless steel N-Nickel plated brass	W- White Y- Yellow B- Blue G- Green R- Red O- Orange	NONE-Base voltage*** 3.3V 6V 12V 24V 36V 110V

Notes:


*PV: only 8mm and 12mm
 **Ring illum. for 16~19mm, 6~12mm dot illum. only or request
 ***Base voltage on LEDs:
 1.8V @ 20mA for red, yellow and orange LED colors
 2.8V @ 20mA for blue, green and white LED colors

Dimensions

PI06

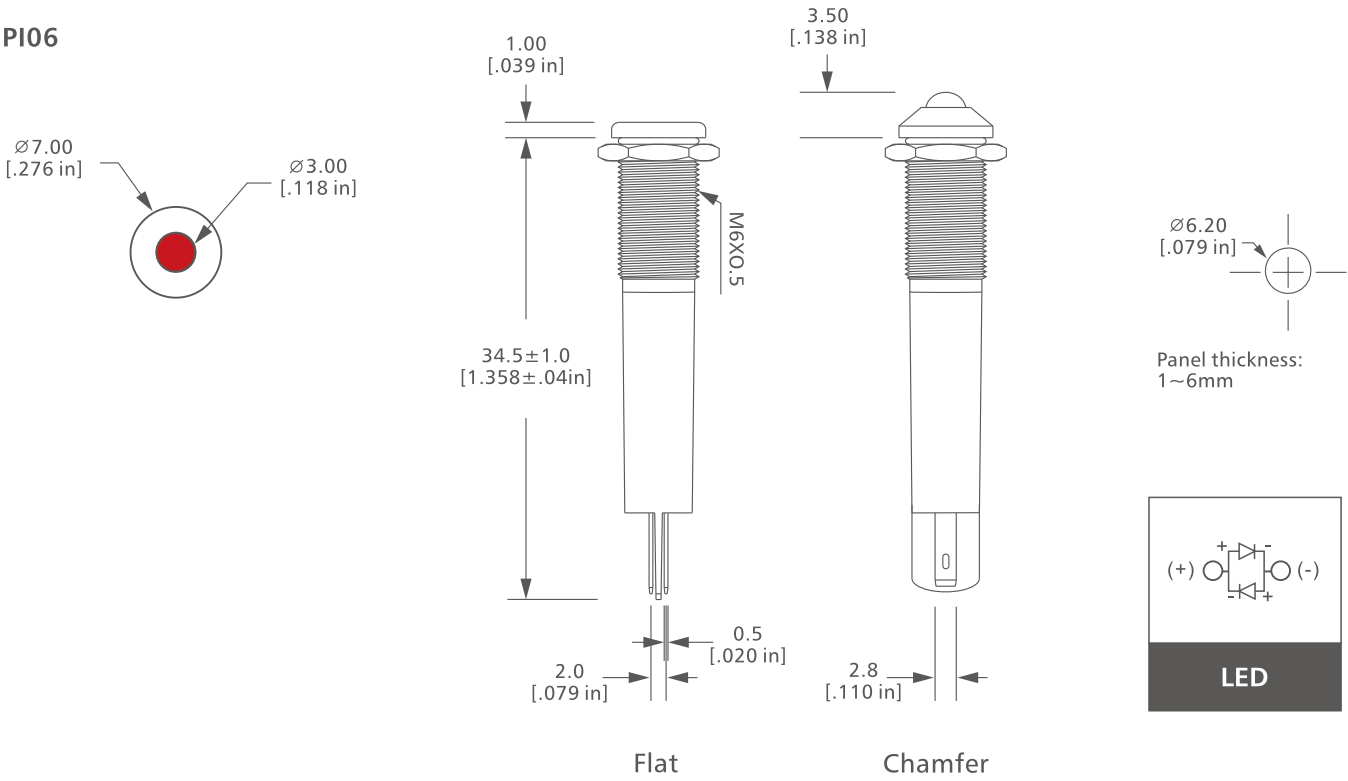


PI08

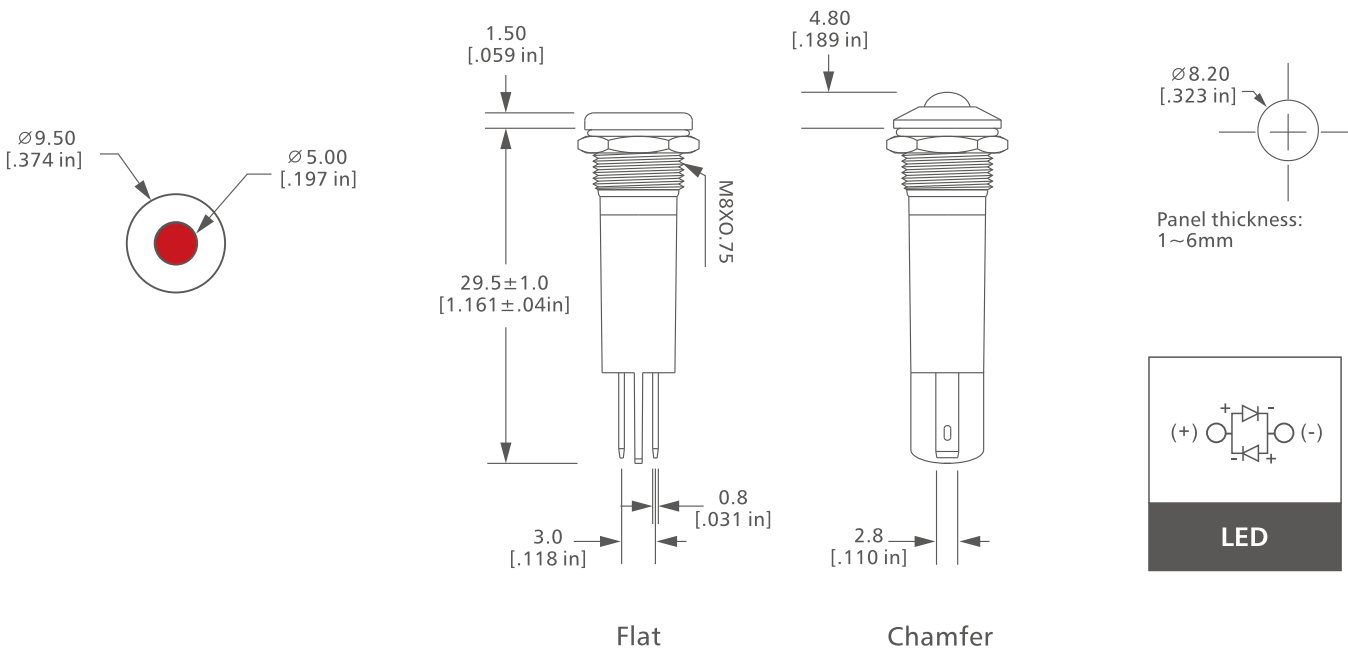


Dimensions

PI10

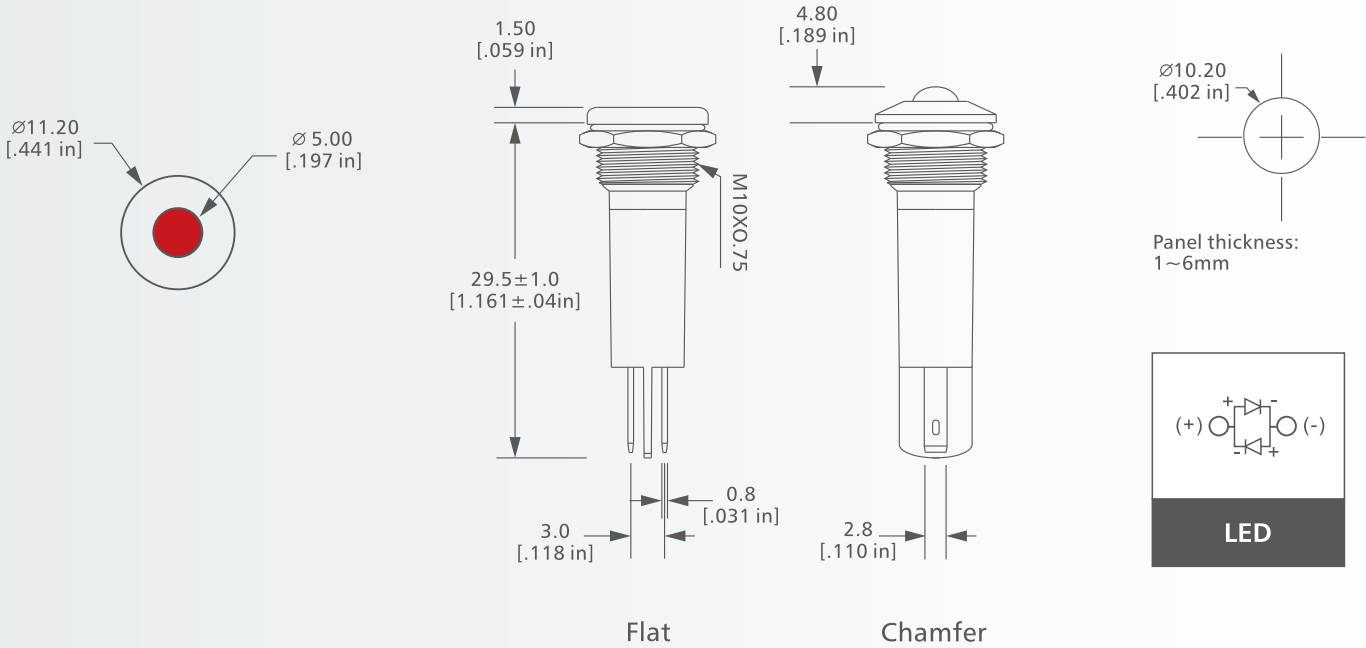


PI12

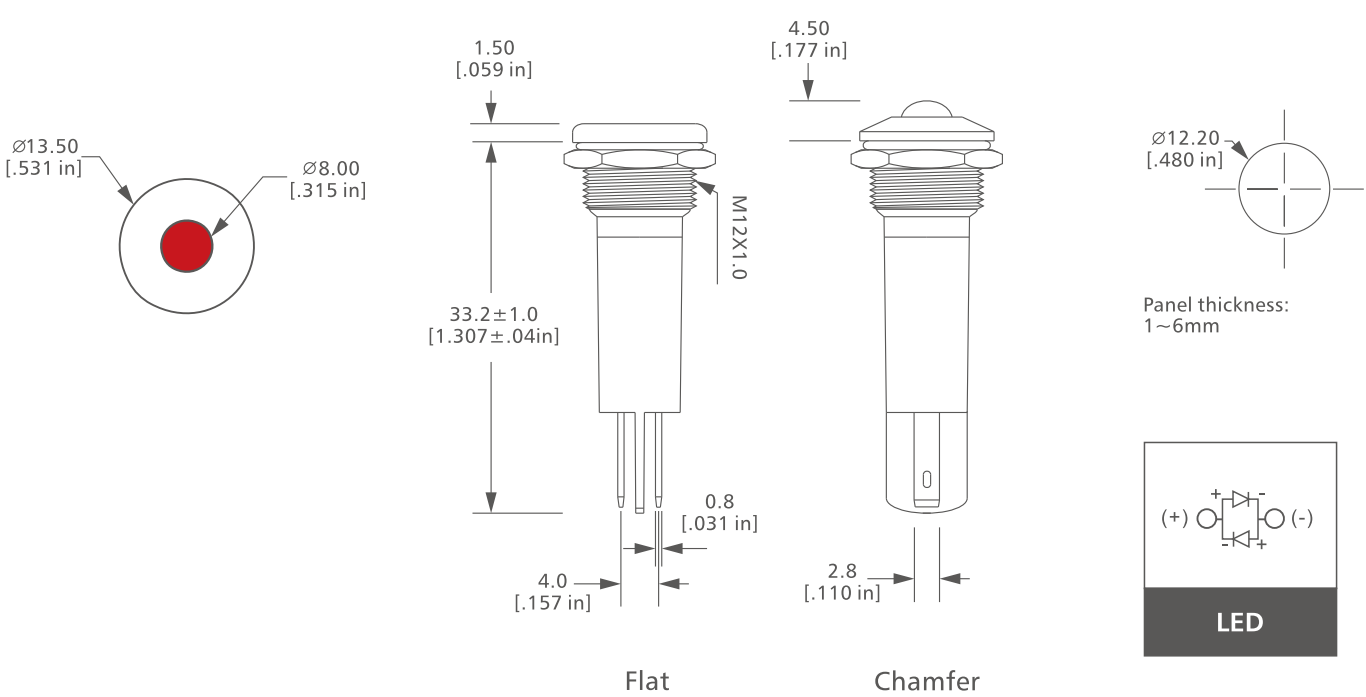


Dimensions

PI14

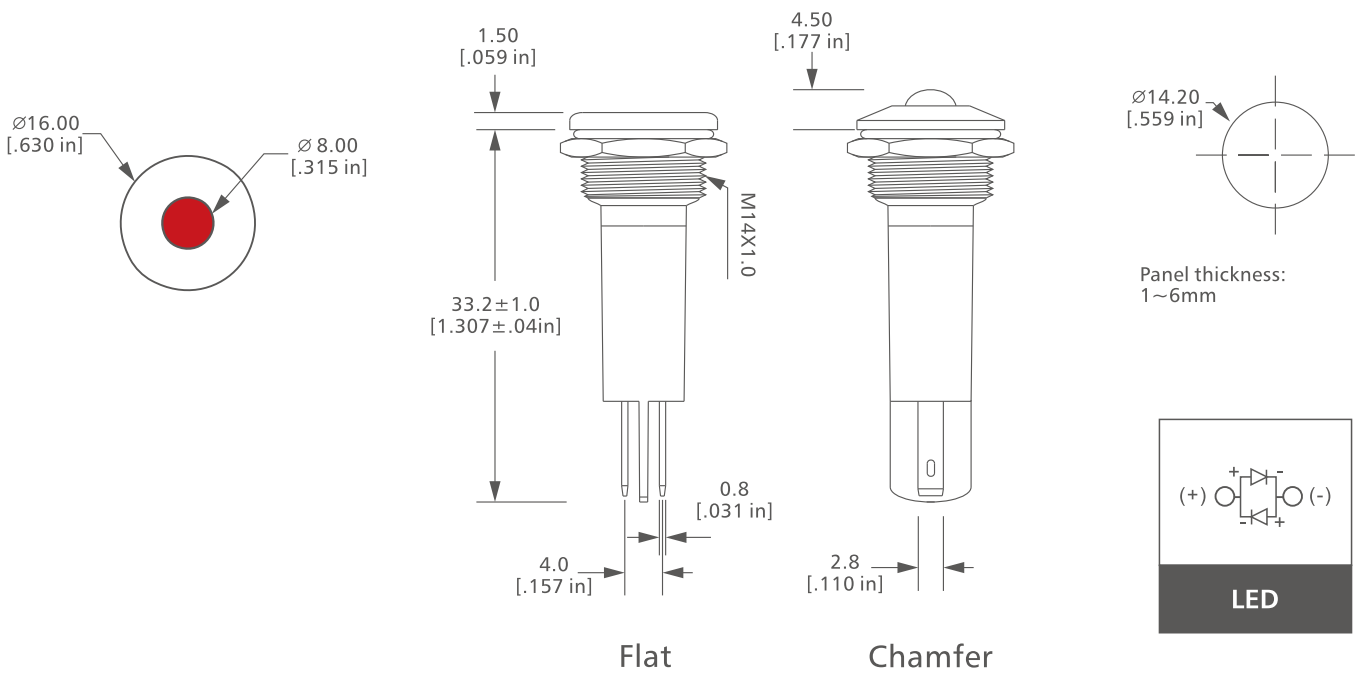


PI16

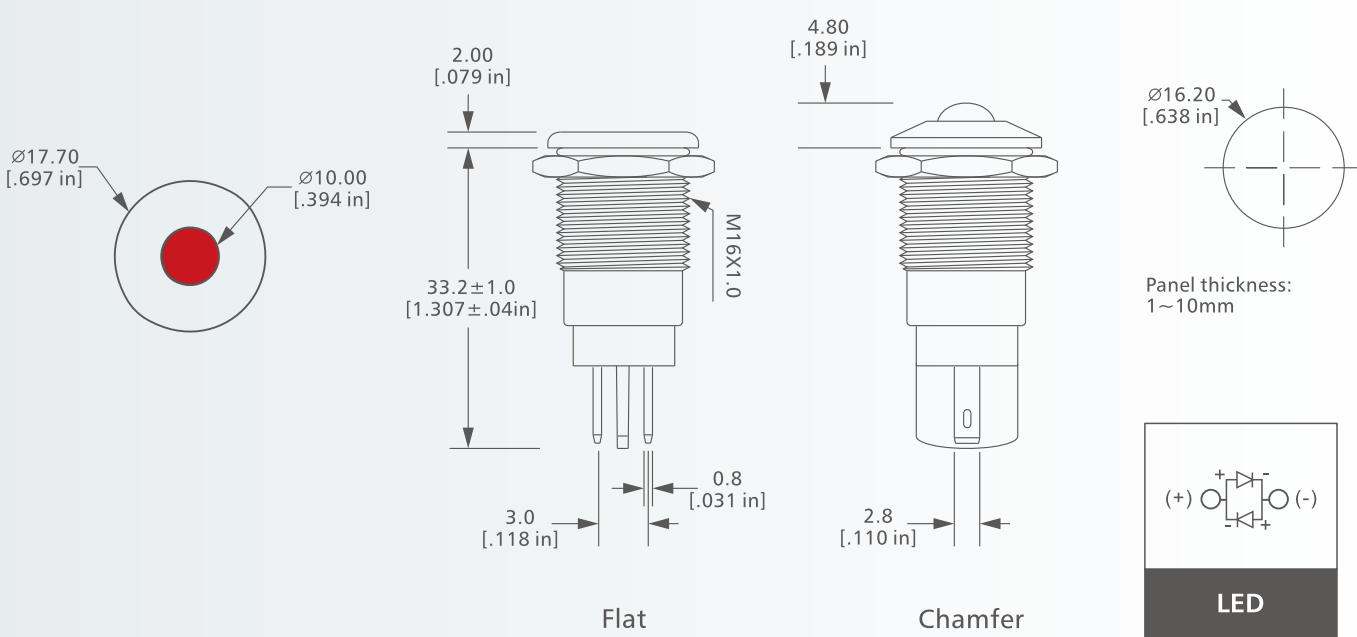


Dimensions

PI19

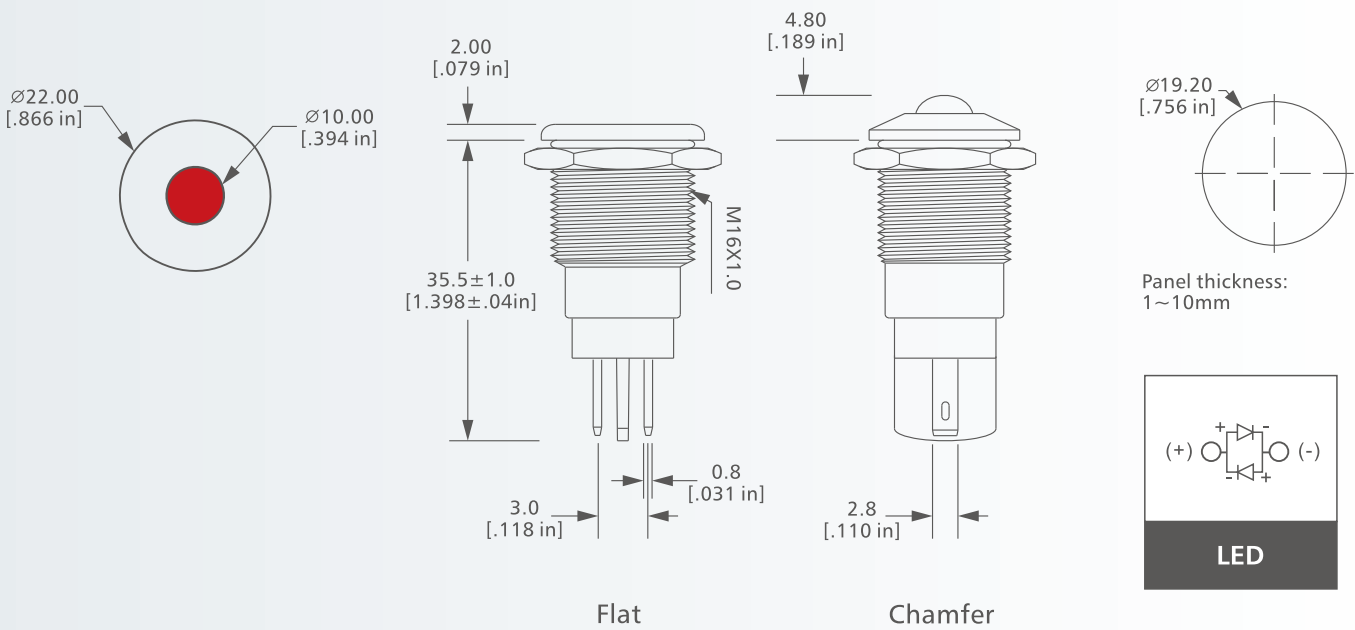

PV8

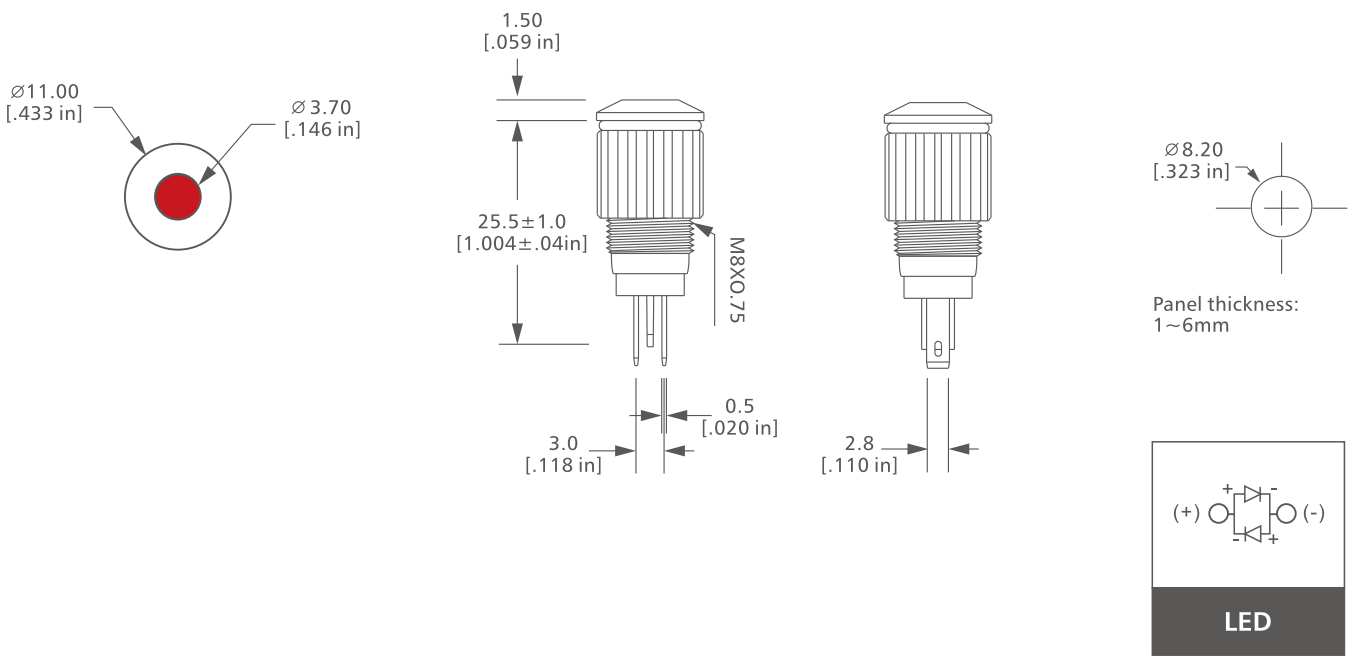

Dimensions

PV12

