

Emergency Stop Switch

Ø16mm/Ø19mm/Ø22mm



PRODUCT DESCRIPTION

The Turn to Release Emergency Stop Switches provides you with a way to stop your actuator instantly in case of emergency. All you do is press the button down and it will lock in the Off position, stopping the movement of your actuator. To put it back in the On position, just turn the switch clockwise to release it. Please be aware you may require a relay for actuator control.

SPECIFICATIONS

Max Rating: I_{th}: 5A, U_i: 250VAC
Switch Rating: 250VAC 0.5A
Mechanical Life: 1,000,000 Cycles
Electrical Life: 50,000 Cycles
Contact Resistance: 50mΩ Max.
Insulation Resistance: 1000 MΩ Min.
Dielectric Strength: 2,000VAC
Operating/Storage Temperature: -20°C to 55°C
Panel Thickness: 1-5mm
Mounting Nut Torque: 5-14Nm

FEATURES & BENEFITS

- 16, 19 or 22mm diameter panel cutout
- Push lock - Turn Release
- 1NO1NC, 2NO2NC
- Solder lug (2.8X0.5mm)
- IP65 rated


PART NUMBER CONFIGURATOR

Series	Actuator ** Options	Terminal Options	Function Options	Material Options	Graphic (Optional)
<input type="checkbox"/>					
ES16 - 16mm*	NONE - Smooth edge	NONE	Solder-lug (2.0x0.5)	11-1NO1NC	S - Stainless Steel
ES19 - 19mm	K - Knurled edge		22-2NO2NC		B - Nickel Plated-brass
ES22 - 22mm					Customizable

NOTES:
* ES16 for plastic body.
** Accept customizable.

Specifications subject to change without notice


Applications / Markets

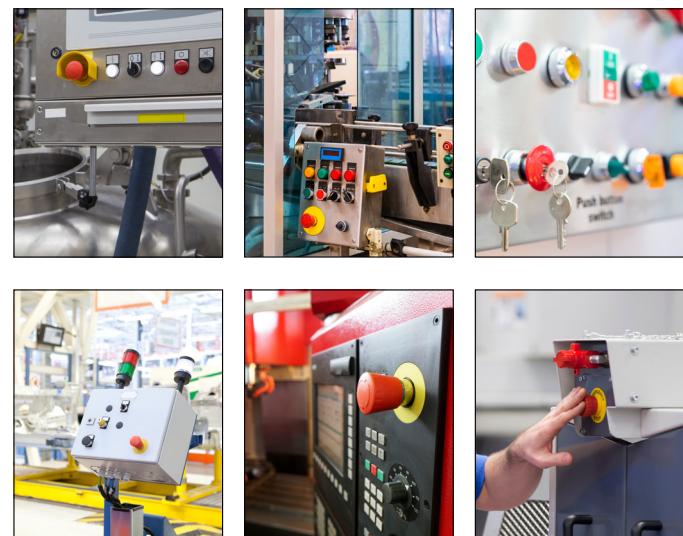



Emergency Stop Switch

Ø16mm

DIMENSIONS

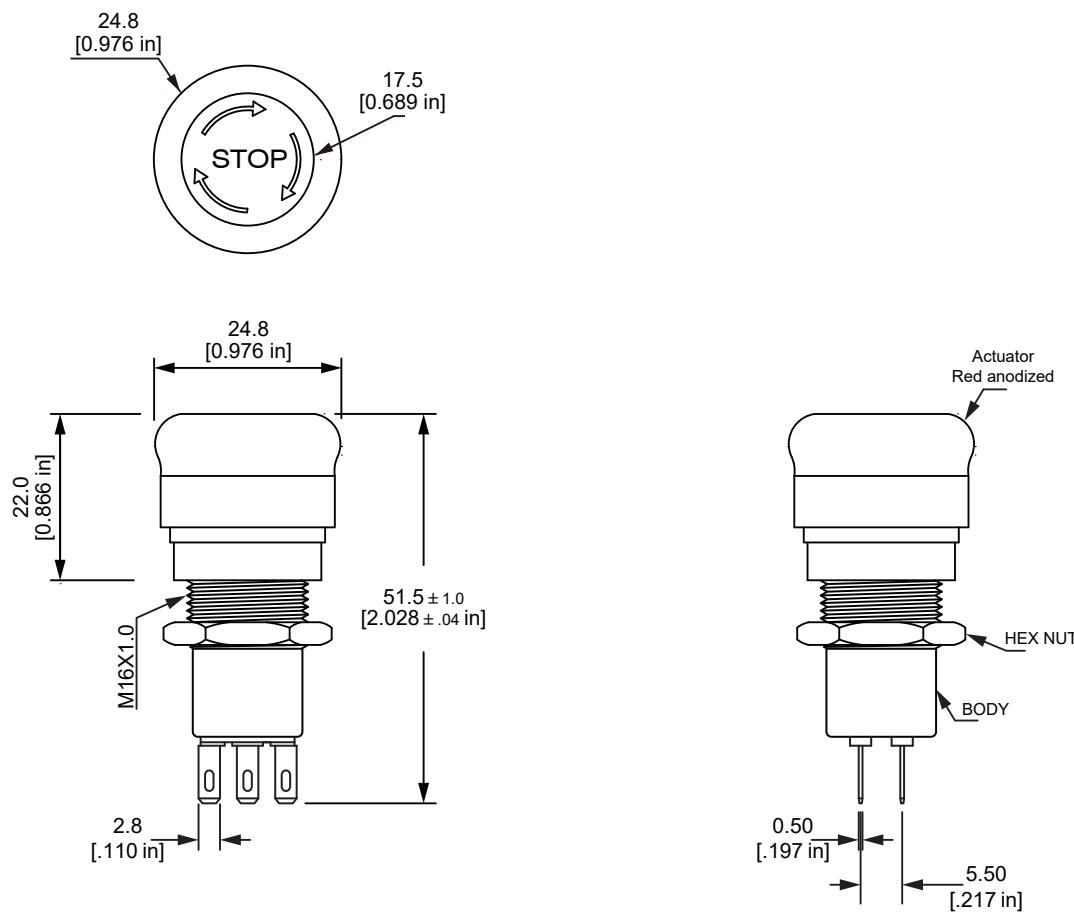



C = Common
 NO = Normally open
 NC = Normally closed

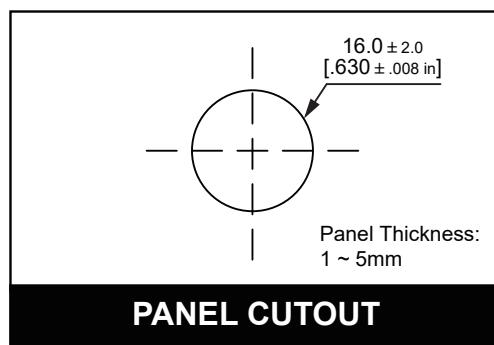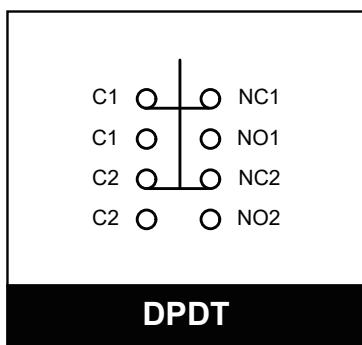



Emergency Stop Switch

Ø19mm

SMOOTH EDGE

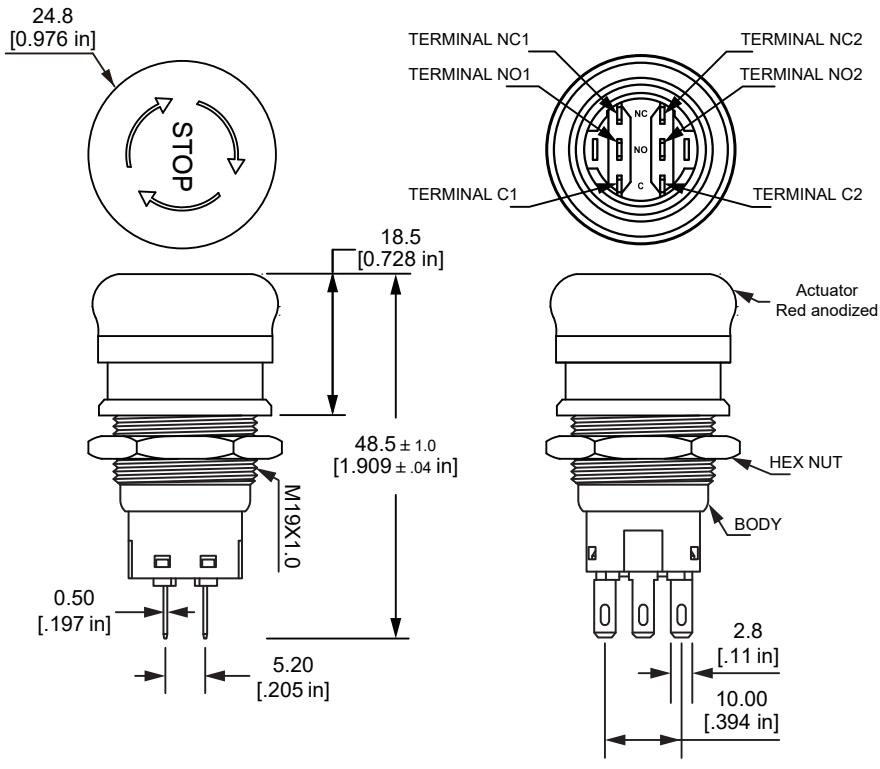


KNURLED EDGE

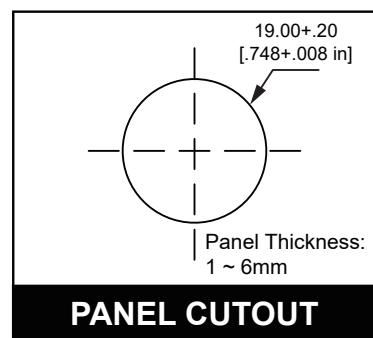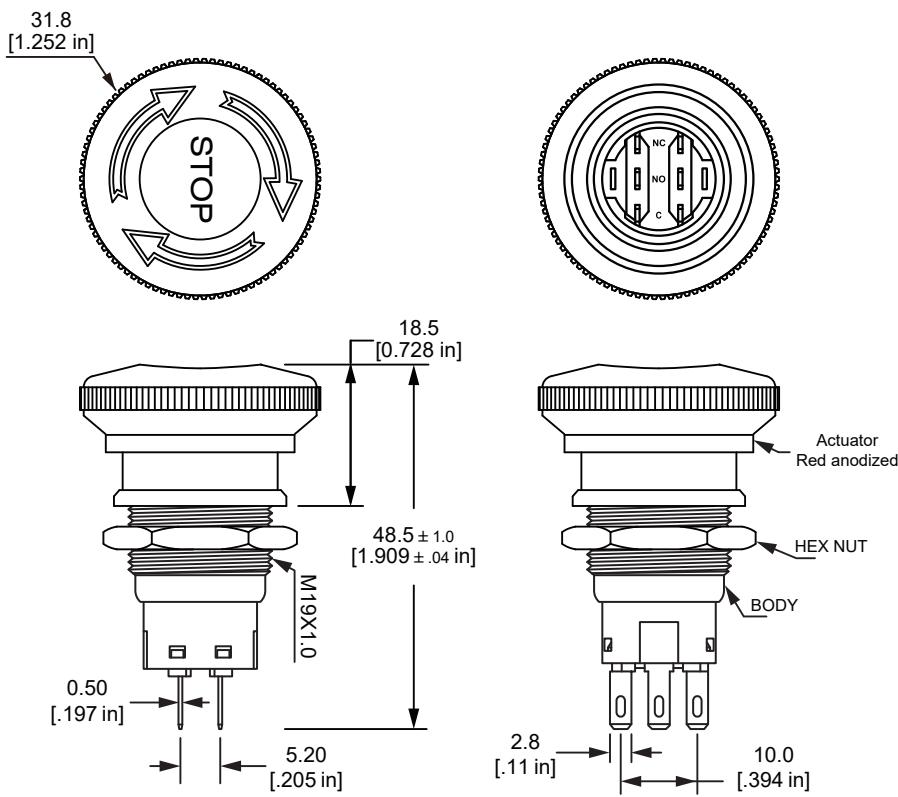

PANEL CUTOUT

Emergency Stop Switch Ø22mm

SMOOTH EDGE

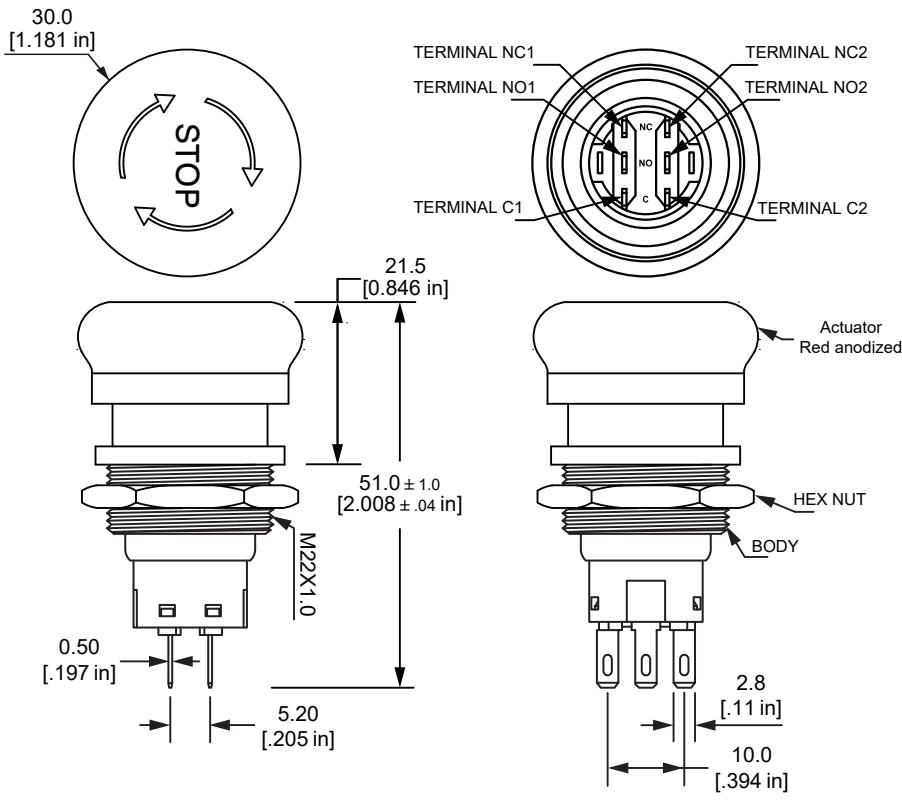

KNURLED EDGE

